




11636 GOLDRING RD • ARCADIA, CALIFORNIA 91006-5815
626-358-2559 • FAX 626-359-5701 • 800-525-6925

Instructions TLP-107 Telephone Recorder Patch with Beeps P/N 44160-7 C Series

The TLP-107 provides an analog audio connection to loggers (central recorders) from telephones that have modular connected handsets or headsets. The TLP-107 provides clear recording of both sides of conversations from almost all types of telephones whether they are the new digital phones or the older analog types.

The TLP-107 injects a short "beep" at approximately 15 second intervals onto the phone line. The "beep" is audible in the earphones of all phones connected to the conversation and is superimposed on a clear recording of both sides of the conversation. The "beep" may be stopped by removing the power cord plug. The beep volume is adjustable using a small screwdriver through the hole in the bottom of the unit as shown below.

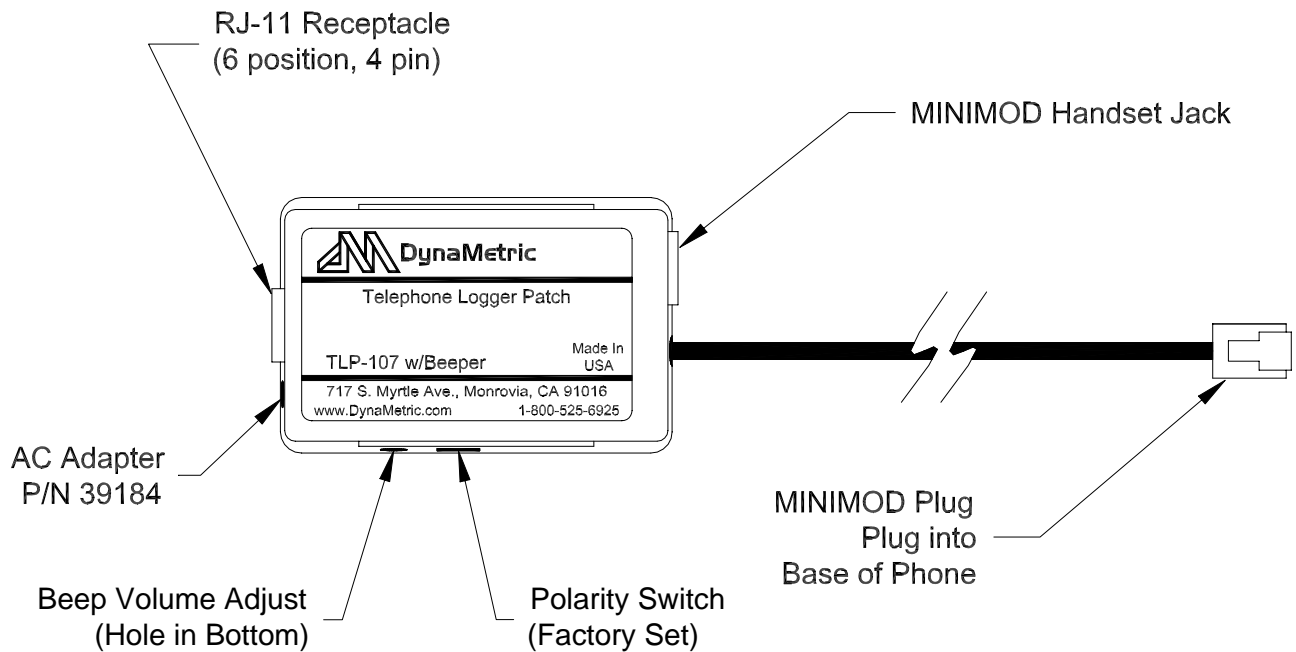

Instructions
TLP-107 Telephone Recorder Patch with Beeps
P/N 44160-7 C Series

To install the unit, disconnect the handset coil cord from the base of the telephone and replace it with the cable from the TLP-107. Connect the handset coil cord into the mini-mod jack on the TLP-107. Connect a line cord from the logger into the RJ-11 jack on the TLP-107. The unit may be mounted at a convenient location on the base of the telephone utilizing the adhesive pad. Only the two central conductors of the RJ-11 jack in the unit are connected and carry the audio signal. Plug the 6VDC AC Adapter (P/N 39184), furnished with the unit, into an adjacent utility outlet for 115VAC power. Insert the 1.3mm plug on the power cord into the jack on the TLP-107.

